

SPECIFICATION

Part No.: NSP-R120-5B




NEWSTAR LED Lighting

Features

- No UV or IR light radiation.
- Easy Installation
- Long lifetime: 50000 hours
- Correlated Color Temperature:2700-6500K
- AC100~240 V input.
- Working Voltage: DC18-24V
- LED type: 2835SMD
- Indoor use only
- CE, RoHS Certified



C0 PLANE ISOLUX DIAGRAM (UNIT:LX)

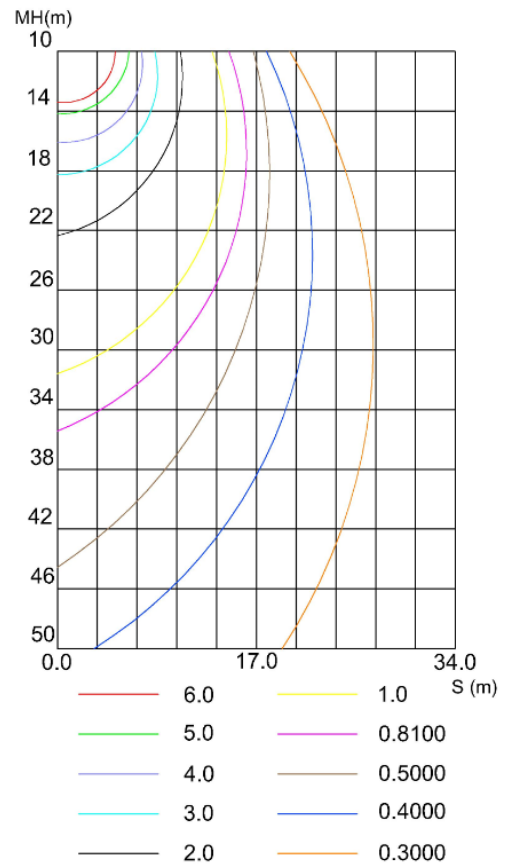

Technical Specifications

Power	5W	CRI	>80
Lumens	400lm±10%	Frequency Range	50-60Hz
Fixture efficiency	>0.85	Beam Angle	120°
Power Factor	>0.80	Fixing Ways	Mounting
Light Source	2835SMD	Dimension	Φ120*H40mm
Packing Size	150*150*46mm	Dimmable	Available
Carton Size	320*320*530mm,40PCS/CTN	Warranty	3 years

SPECIFICATION

Application

- Home and office lighting.
- Hotel lighting.
- Super market lighting
- Warehouse lighting
- Airport lighting
- Factory lighting
- Classroom lighting
- Other light sources

