

## **SPECIFICATION**



# NEWSTAR LED Lighting

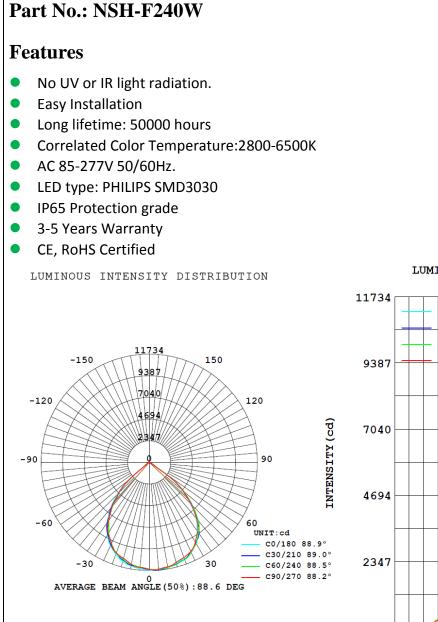

LUMINOUS INTENSITY DISTRIBUTION

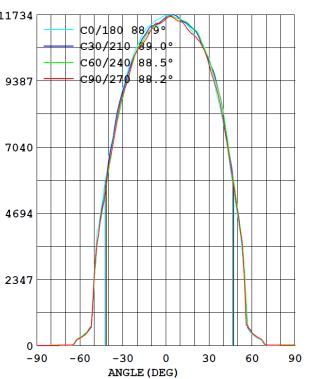

#### **Technical Specifications**

Power	240W	CRI	≥80
Lumens	26000LM	Color Temperature	2800~6500K
Fixture efficiency	>0.95	Beam Angle	120 Degree
Power Factor	>0.97	Frequency Range	50-60Hz
Light Source	PHILIPS SMD3030	Dimension	¢420*182MM
Driver	MeanWell & CE Driver	Working Temperature	-30°C ~+65°C
Body& Lampshade	Aluminum Alloy	Housing Color	Black/Silver

## **SPECIFICATION**

### Application

- Shopping mall lighting.
- Exhibition hall lighting
- Parking lot lighting
- Gymnasium lighting
- park, sculpture and national green lighting project
- Tourist attractions lighting
- Green area lighting
- The building elevation of lighting
- Other light sources





NEWSTAR LED Co., Ltd LED Lighting Manufacturer In China 1-May-16 © 2016 NEWSTAR Phone: +86-755-2940-5686 E-mail: info@newstarleds.com http://www.newstarleds.com